


SPECIAL EMPHASIS CROSSWALK DETAIL SPECIFICATION

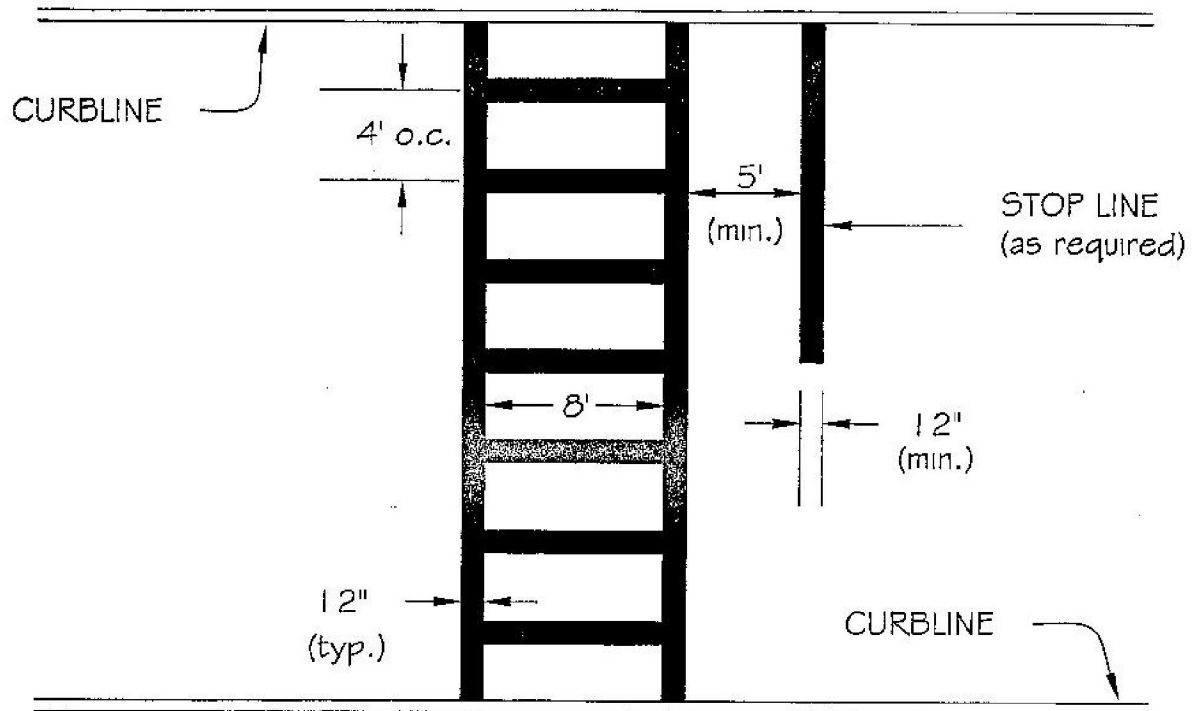

NOTES:

- 1.) All twelve inch (12") thermo-plastic lines shall be applied in one (1) application, no combination of lines (i.e. two 6" lines) will be accepted.
- 2.) Layout of crosswalks shall be approved by a Boston Transportation Department (BTD) Engineer prior to thermo-plastic being applied.
- 3.) All crosswalks installed shall conform to the relevant provisions of the Massachusetts Highway Department "Standard Specification for Highway and Bridges" dated 1988, section 860 for reflectorized line (thermo-plastic) & material M7.01.20, latest revisions.
- 4.) "Special Emphasis" crosswalks shall be installed at the direction of the BTD Engineer only.

Rev. January 3, 2001

A308